

General Description

The Digital Blocks DB-I2C-S-Hs-Mode I2C Slave Controller IP Core interfaces user Registers to an I2C Bus or Memory (SDRAM / SRAM / Flash / FIFO) or any Peripheral or CPU connecting through an internal AHB / APB / AXI / Avalon / Qsys Bus to an I2C Bus in Hs-Mode (3.4 Mbit/s) / Fast-Mode Plus (1 Mbit/s) / Fast-Mode (400 Kbit/s) / Standard-Mode (100 Kbit/s).

The DB-I2C-S-Hs-Mode Controller implements the Slave-Transmit and Slave-Receive protocol according to the Philips I2C-Bus Specification, Version 2.1 as well as the updated NXP Rev 7 – 1 Oct 2021 Specification.

Figure 1 depicts the system view of the DB-I2C-S-Hs-Mode Slave Controller IP Core embedded within an ASIC, ASSP or FPGA device. The DB-I2C-S-Hs-Mode Controller receives and transmits data with respect to an external I2C Master Controller. The DB-I2C-S-Hs-Mode can interface to a user Register Array, Memory such as SRAM, SDRAM, Flash, or a FIFO, or a Peripheral or CPU.

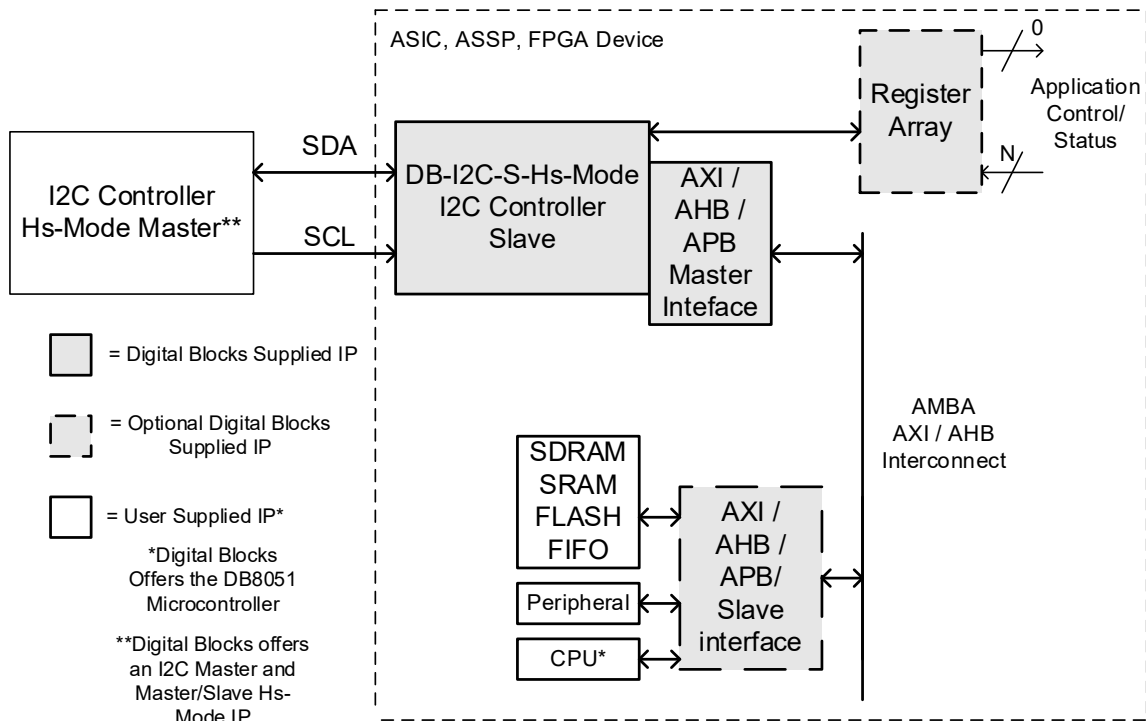


Figure 1: DB-I2C-S-Hs-Mode Slave Controller - System View

The DB-I2C-S-Hs-Mode IP Core can function standalone, without the requirement for an embedded processor.

Features

- I2C Slave Controller - Implements Slave-only protocol for smaller VLSI footprint:
 - Slave–Transmitter
 - Slave–Receiver
- Supports four I2C bus speeds:
 - Hs-Mode (3.4+ Mb/s)
 - Fast Mode Plus (1 Mbit/s)
 - Fast Mode (400 Kb/s)
 - Standard Mode (100 Kb/s)
- Digital Blocks optionally supplies a RTL Parameterized Register Array the user can use to construct their registers, or a Register Array / SDRAM / SRAM / Flash / FIFO Interface the user can use to connect to their existing designs, or an AHB / APB / AXI / Avalon Master interface the user can connect Memory or Peripherals to that are participating in the I2C transfer.
- DB-I2C-S-Hs-Mode Controller supports single register / memory access or burst access with address auto-increment capability.
- 7- or 10-bit addressing, General Call, SCL Low Wait States
- Enhanced SCL / SDA spike filtering capabilities
- 13 sources of internal interrupts with masking control
- Compliance with I2C specifications:
 - Compliance with AMBA AXI / AHB/ APB Protocol Specifications
 - Compliance with Avalon / Qsys Protocol Specifications
 - Philips – The I2C-Bus Specification, Version 2.1, January 2000
 - NXP Rev 7 – 1 Oct 2021
- Fully-synchronous, synthesizable Verilog RTL core, with rising-edge clocking, no gated clocks, and no internal tri-states, for easy integration into FPGA or ASIC design flows.

Digital Blocks offers I2C Master/Slave, Master-only, and Slave-only Controller IP supporting Hs-Mode / Fast Mode Plus / Fast Mode / Standard Mode.

Pin Description

The DB-I2C-S-Hs-Mode I2C Slave Controller interface signals are listed in Table 1.

Name	Type	Description
I2C Bus Interface		
SDAI	Input	Serial Data
SDAO	Output	Serial Data
SCLI	Input	Serial Clock Line
Register Array / SRAM / FIFO / AMBA / Avalon Interface		
Please contact Digital Blocks for more information		

Table 1: DB-I2C-S-Hs-Mode – I/O Pin Description

Verification Method

The DB-I2C-S-Hs-Mode Controller IP Core contains a test suite that generates & sends I2C transactions, monitors the I2C bus protocol, and checks expected results.

The DB-I2C-S-Hs-Mode Controller IP Core has internally been verified as follows:

- Instantiated within an FPGA, and communicating with NXP I2C Master IP Controller, and an ARM processor within the FPGA for expected data checking.
- I2C Bus Compliance testing with lab instrumentation.
- Customer Implementations.

Customer Evaluation

Digital Blocks offers a variety of methods for prospective customers to evaluate the DB-I2C-S-Hs-Mode. Please contact Digital Blocks for additional information.

Deliverables

The DB-I2C-S-Hs-Mode is available in synthesizable RTL Verilog or a technology-specific netlist for FPGAs, along with Synopsys Design Constraints, a simulation test bench with expected results, datasheet, and user manual.

Ordering Information

Please contact Digital Blocks for additional technical, pricing, evaluation, and support information.

Digital Blocks, Inc.
PO Box 192
587 Rock Rd
Glen Rock, NJ 07452 USA
Phone: +1-201-251-1281
eFax: +1-702-552-1905
info@digitalblocks.com

Copyright © Digital Blocks, Inc. 2007 - 2022, ALL RIGHTS RESERVED

###

Digital Blocks is a registered trademark of Digital Blocks, Inc.
All other trademarks are the property of their respective owners